

ÉCLAIRAGE D'EXTÉRIEUR LED AREA LIGHT

100W/150W/200W/300W



Numéro de pièce Part No.	Pouvoir Power	Tension Voltage	Ecacy	Puce LED ChipLED	Lumen	CCT	CRI	PF	Angle de faisceau Beam Angle	IP
HG-SL-100W	100W	AC120-347V	150lm/W	3030	15000lm	4000K/5000K	70	> 0.95	TYPE III/IV/V	IP65
HG-SL-150W	150W	AC120-347V	150lm/W	3030	22500lm	4000K/5000K	70	> 0.95	TYPE III/IV/V	IP65
HG-SL-200W	200W	AC120-347V	150lm/W	3030	30000lm	4000K/5000K	70	> 0.95	TYPE III/IV/V	IP65
HG-SL-300W	300W	AC120-347V	150lm/W	3030	45000lm	4000K/5000K	70	> 0.95	TYPE III/IV/V	IP65

CARACTÉRISTIQUES DU PRODUIT

Liste UL : convient aux endroits humides.

Marque de puce LED : Luminus.

Protection contre les surtensions : 10 KV.

Gradation : gradation 0-10 V, continue.


Boîtier : aluminium moulé sous pression ADC12.

Options : support en U, réflecteur AL, réflecteur PC.


Intelligent en option : capteur à micro-ondes.

PRODUCT FEATURES

- UL Listing: Suitable for wet locations.
- LED Chip Brand: Luminus.
- Surge Protection: 10KV.
- Dimming: 0-10V dimming, Continuous.
- Housing: ADC12 die-cast aluminum.
- Smart Optional: Photocell Sensor, Shorting Cap.



DIMENSIONS

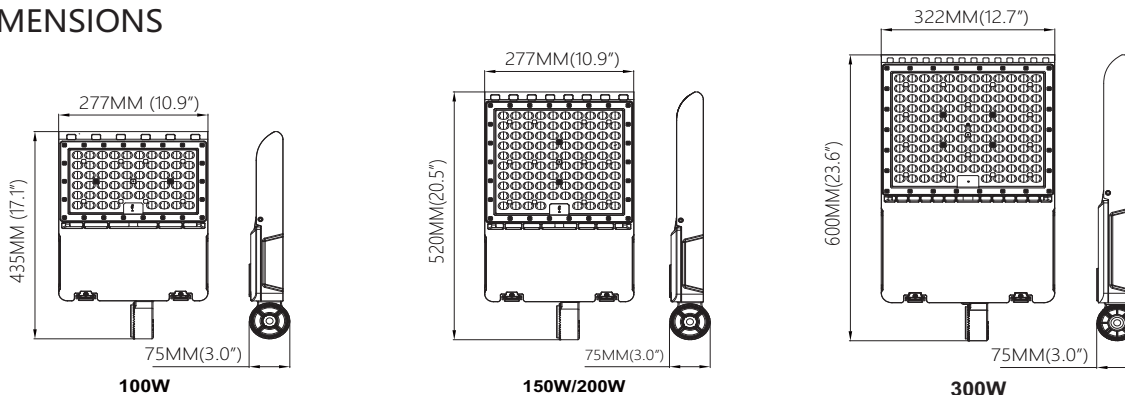

www.lightingqueen.ca

info@lightingqueen.ca

4028 Rue Steinberg Saint Laurent Qc H4R-2G7 ☎ 514 338-1999